

TUFFLOOR®

FOR HIGH TEMPERATURE FLOORING APPLICATIONS



Global Refractory Solutions




SOLUTION TO FLOORING PROBLEMS TUFFLOOR® refractory

TUFFLOOR® is designed for areas exposed to extreme thermal cycling and intermittent exposure to liquid metal spills, dross, and slag. It is a versatile product that can be installed as a complete floor, over existing (or new) concrete, or as precast tiles. TUFFLOOR has over 20 years of proven performance in a ferrous and non-ferrous foundries, primary metal production (aluminum, steel, iron, zinc, copper, fero-alloys), rolling mills and many other hot flooring applications.

Benefits

- Fast project turn around time due to early strength development
- Exceeds cold crushing strength of conventional concrete
- Reduced maintenance time and expense
- Safer working surfaces
- Minimized wear on mobile equipment
- Custom colors available
- Excellent freeze-thaw properties



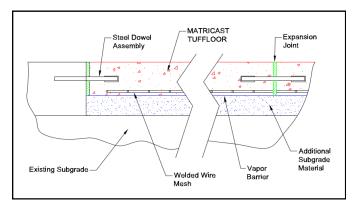

Engineering design for high-load application



Variety of colors available



TUFFLOOR® Standard Concrete
Thermal Cycling to 760°C (1400°F)







STRONG AND VERSATILE TUFFLOOR® PRODUCT LINE


- TUFFLOOR® is the strongest and most versatile product in the family line. It has excellent thermal shock resistance and is often used to replace concrete in both original flooring construction and maintenance applications.
- TUFFLOOR® HT is capable of withstanding continuous temperatures to 1370°C (2500°F) and intermittent temperatures to 1427°C (2600°F).
- TUFFLOOR® HT ACX offers all the benefits of TUFFLOOR HT along with a non-wetting additive. It can withstand continuous temperatures to 1315°C (2400°F) and intermittent temperatures to 1370°C (2500°F).









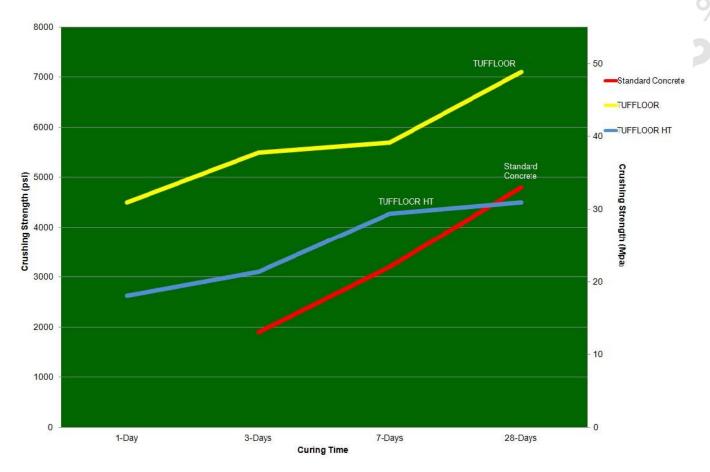



$\sqrt{\ }$ = Recommended

<u> </u>	. 4	ŭ	· <u>Ш</u>
FOUNDRY	77	75/	
Channel and Coreless Furnace Decks		0	0
Furnace Pits		0	0
Mold Shake-Out Area Floors	\checkmark	0	0
Ladle Pouring Station Floors		0	0
Cupola Pits	√	0	0
Aisle Ways	√	0	0
Pig Cooling Bays	√	0	0
Pouring Line Floors	√	0	0
All Metal Splash Area Floors	√	0	0
Slagging Station Floors	√	0	0
OTHER			
Fire Training Facilities	0	\checkmark	0
Steel Stirring Paddles			
COPPER			
Decks and Floors		0	0
Pre-heating Stations		0	0
Spill Containment Pads Around Furnaces	V	0	0
Spill Containment Pads at Casting Stations	$\sqrt{}$	0	0
Splash and Heat Panels	V	0	0
Mold Preheating and Cooling Areas	$\sqrt{}$	$\sqrt{}$	$\sqrt{}$

APPLICATION GUIDE

refractory

STEEL	TF	НТ	TILES
Coke Oven	- ''	1111	TILLO
Coke Oven Wharfs	*	V /	
Quench Stations	V	2	~,V)
	N	V	
Oven Tops	٧	¥3	٧
Blast Furnace)	
Casthouse Floors	1	√	√
Tuyere Platform Floors	1		\checkmark
Track Areas at Hot Metal Pouring Stations	1	√	
BOF then	nal	expo	Insion
Hot Metal Pouring Station Floors	1		√
Slag Skimming Station Floors	V	√	√
Furnace Deck	V	1	/ 1
Ladle Teaming Area Floors	V	-1	1
Arc Furnace Shops		- (9)	81
Ladle Preheat Stations Floors	1	1	√
Furnace Decks and Pits	√	√	√
Other Steel			0/-
Desulfurization Station Floors and Decks	V	\checkmark	1
Sinter Machine Area Floors and Decks	V	$\sqrt{}$	_ √
Ladle Metallurgy Station Floors and Decks	V	\checkmark	\sim
Degasser Station Floors and Decks	V	1	1
Slab Mill Runout Table Floors	√	1	1

ALUMINUM	TF	HT	HT ACX
Pot line Floors	$\sqrt{}$		
Furnace Area Floors	√	0	0
Casthouse Floors	$\sqrt{}$	0	0
Die Cast Shop Floors	√	0	0
Hot Slab and Coil Storage Areas	0	√	0
Dross Cooling and Transfer Area Floors	0	√	0
Ladle Pads and Pouring Station Floors	√	0	0



Revised 4/02/20

Visit alliedmineral.com for more information.