

Diecast Furnace


Application Guide

HIGHLIGHTS

- Non-wetting castables for aluminum contact applications
- A complete range of product compositions available for lining customization

ALLIED BENEFITS

- Global sales, service and engineering teams
- Flexible worldwide manufacturing and supply capabilities
- State of the art research capabilities

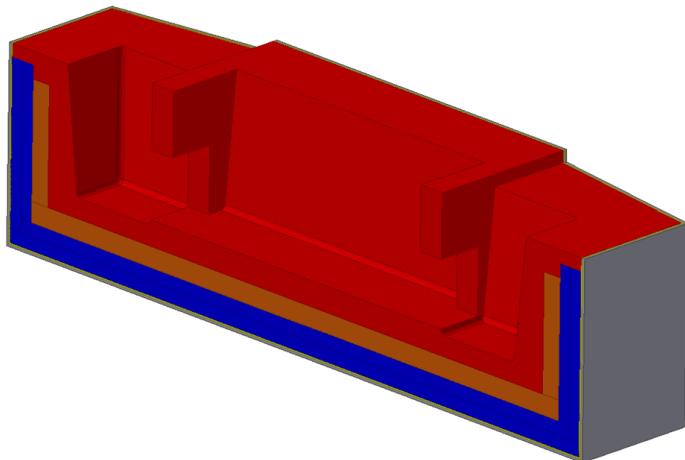

Area	Products	Alumina Content	Silica Content	Installation Method
FURNACE LINING	MATRIFLO 85ACX	85.6	8.5	Vibration
	MATRIPUMP 72ACX	78.6	15.6	Vibration
	QUICK CAST® 61ACX	66.3	27.7	Vibration
	QUICK-FIRE® 88	88.2	3.9	Vibration
	WAM® AL II CASTABLE	61.4	0.7	Vibration
	WAM® AL II HDF CASTABLE	64.3	0.4	Vibration

Area	Products	Alumina Content	Silica Content	Installation Method
SAFETY LINING	DRI-LITE® 79AL-M	42.9	49.1	Dry ram
	MATRICAST 2600AC	45.2	42.4	Vibration
	BETAMAX 24LT	42.4	39.7	Vibration