

Designed for reliability. Proven in the field.

MATRIFLO 80 ACX PUMP delivers consistent, high-performing material for dense, abrasive refractory applications. This high alumina, low cement castable is specifically engineered for metal contact in the aluminum casting industry.


MATRIFLO 80 ACX PUMP offers excellent resistance to flux attack and corundum formation. The versatile installation characteristics of this product make the material easy to install and pump effectively across various water content ranges.

Benefits

- Versatile Installation—Pumping, Shotcrete, Vibration Cast
- High Strength
- Thermal Shock & Abrasion Resistance
- Excellent Non-Wetting Properties
- Corrosion Resistance

Ideal Applications

- Hearths, lower walls, ramps, sills, etc.
- Metal Contact
- New Lining
- Repair and Maintenance

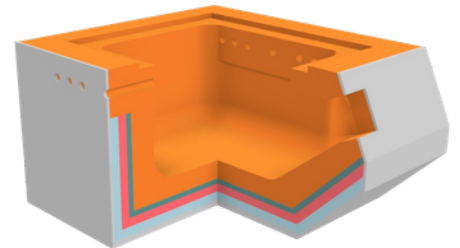

Product	Al ₂ O ₃	SiO ₂	Density	Installation Method
MATRIFLO 80 ACX PUMP	77.9%	14.2%	2.64 g/cm ³ (165 lb/ft ³)	Pump, Shotcrete, Vibration Cast



Pumping MATRIFLO 80 ACX PUMP
into Forms



MATRIFLO 80 ACX PUMP
Installation



MATRIFLO 80 ACX PUMP in
Lower Sidewall



Global **Refractory** Solutions